



frequency control solutions

Y1631

LOW PHASE NOISE
ULTRA-LOW G-SENSITIVITY

XO

Product Description

Greenray Industries' Y1631 XO offers good phase noise performance in a compact, rugged package



Features

- Frequency Range: 60 MHz to 130 MHz
- 17.3 mm sq. package
- 5 VDC Supply
- Sinewave output
- Random Vibration per MIL-STD-202, Method 214
- Shock per MIL-STD-202, Method 213
- RoHS compliant

Applications

- Telecommunications
- Mobile radio
- Mobile instrumentation
- Airborne communication
- Wireless communication
- Microwave receiver

Rev. E



intertek

Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2022 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

Y1631 SERIES
60 MHz to 130 MHz



Electrical Characteristics

Frequency Characteristics						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency		60		130	MHz	
Frequency Stability (other stability available)	-20°C to +70°C		± 15		ppm	N
	-40°C to +85°C		± 20		ppm	T
Aging	1 st year			± 1	ppm	
	10 years (100 MHz)			± 3	ppm	
Acceleration Sensitivity	(note 1)			2.0	ppb/g	SD
				0.5	ppb/g	LG
				0.09	ppb/g	ULG
Frequency vs Voltage	For a 5% change			± 0.1	ppm	
Frequency vs Load	For a 10% change			± 0.1	ppm	
Electronic Frequency Control	EFC = +0.5 to SUP.-0.5 Positive slope		± 10		ppm	
Phase Noise Performance						
Parameter	Frequency Offset (Hz)	Min	Typical	Max	Units	Ordering Code
Static @ 100 MHz nominal Frequency	10		-83		dBc/Hz	
	100		-120		dBc/Hz	
	1k		-149		dBc/Hz	
	10 k		-160		dBc/Hz	
	100 k		-167		dBc/Hz	
	1 M		-170		dBc/Hz	
DC Supply						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Supply Voltage		4.75	5.0	5.25	Vdc	
Supply Current				30	mA	
RF Output: Sinewave						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Harmonics				-45	dBc	
Spurious				-90	dBc	
Load			50		Ω	
Level	50 Ω load	+10			dBm	

(1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2022 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

Y1631 SERIES
60 MHz to 130 MHz



Environmental and Mechanical Specifications

Screenings			
Screening	Standard	Method, Condition	Description
Random Vibration	MIL-STD-202	214, Cond I-A	0.3 PSD, 20.7 G rms
Shock	MIL-STD-202	213, Cond C	30 g, 11 ms, sawtooth

Recommendation and General Information

Conditions	
Parameter	Notes
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +105°C
Terminal Finish	Gold plating (RoHS) is standard (E). SnPb 63/37 also available
Package Weight	< 3 grams
Soldering Instruction	Hand or reflow soldering
Shipping	Tray pack
Marking	Line 1: Greenray logo Line 2: Model Line 3: Frequency Line 4: Serial Number + Data Code (YYWW) Line 5: Lot Number

Ordering Example

Y1631	-	N	-	80.0 MHz	-	E
Model		Stability Code		Frequency in MHz		Termination finish
		Refer to Electrical Specs Table* N (-20 to 70°C) T (-40 to 85°C)		From 60 to 130 MHz		<u>Code: Pads finish</u> E: Gold plated (RoHS), Standard PB: SnPb 63/37 (non-RoHS) LF: SnAg 96.5/3.5 (Lead-free)

*Other frequency stabilities available, please contact factory



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2022 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.




frequency control solutions

Y1631 SERIES
60 MHz to 130 MHz



Package dimensions and Pad Connections

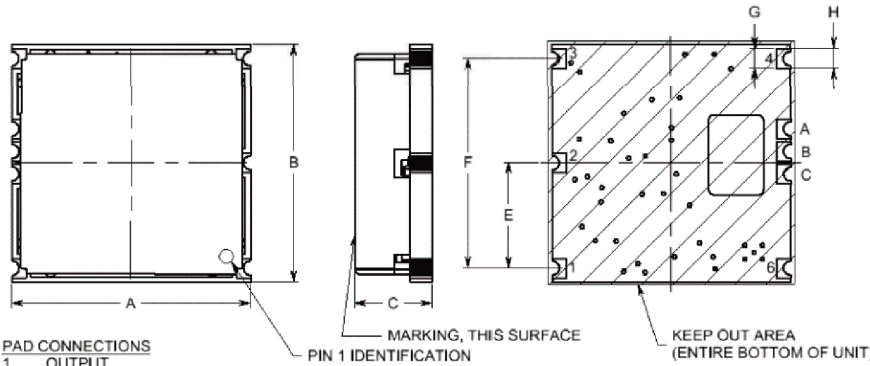

- PAD CONNECTIONS**
- 1. OUTPUT
 - 2. NC
 - 3. SUPPLY
 - 4. EFC
 - 6. 0V & CASE GND
 - A. COMP V (INTERNAL USE ONLY)
 - B. NC (INTERNAL USE ONLY)
 - C. V REF (INTERNAL USE ONLY)

DIM	inches	mm	inches	mm
A	0.680	17.27	0.895	17.65
B	0.680	17.27	0.895	17.65
C	0.220	5.58	0.235	6.02
D	0.300	7.62	0.315	6.10
E	0.600	15.24	0.815	15.62
F	0.056	1.42	NA	NA
G	0.056	1.42	NA	NA



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2022 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.